



XA2*series*

THE NEW BATTERY-POWERED
HYDRAULIC POWER PACK

WWW.PLARAD.COM

XA2power

THE WORLD'S LIGHTEST BATTERY-POWERED HIGH-PERFORMANCE PUMP WITH AUTOMATIC MODE

The XA2power is the ideal entry point into our battery-powered hydraulic pump range: lightweight, mobile, fast and robust for reliable everyday use. Operation is exceptionally intuitive thanks to the menu-guided display with direct torque input in Newton metres or foot-pound – allowing the required torque to be set within seconds, with no unnecessary steps. The wired remote control ensures you retain full control even from a distance.

At its core is a precise, automated torque tightening process that ensures reproducible and reliable bolting results. This makes the XA2power the perfect foundation, with the flexibility to upgrade to docu or control at any time.



1

DISPLAY

Direct input of bolting case parameters

2

REMOTE

Convenient operation even in confined spaces - in automatic or manual mode

3

BATTERY

8 Ah high-performance battery for up to 160 bolting operations, with a spare

4

OIL VOLUME

2.5 l oil capacity, allowing the operation of larger tools as well



XA2docu

YOUR BOLTING OPERATIONS, FULLY DOCUMENTED

The XA2docu builds on the XA2power and adds three powerful features. Every bolting operation is fully documented, providing reliable proof of quality. Thanks to Wi-Fi connectivity, your data can be transferred and managed with ease. Practical presets also allow you to recall your bolting parameters at the touch of a button. In this way, the XA2docu combines the power of the base model with smart quality assurance.




XA2control

MAXIMUM PRECISION WITH EVERY BOLTING OPERATION

The XA2control is the premium model in our battery-powered hydraulic pump range, combining all the advantages of the XA2docu and XA2power. It also introduces angle-controlled tightening and combined torque-and-angle tightening methods – delivering maximum precision even for the most demanding bolting applications. This gives you full control over torque and angle at all times, ensuring reliable compliance with even the most stringent quality.

XA2 VERSUS XE1

The comparison shows that the XA2series delivers a significantly higher flow rate across the entire pressure range than a two-stage mains-powered unit. While its flow rate drops sharply after the stage change, the XA2series decreases continuously and therefore remains noticeably faster.

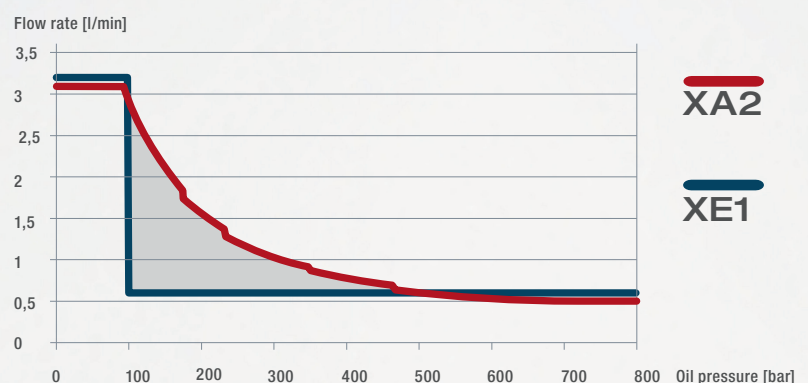

DATA

Akkusystem	2 x Akku 28 V 8 Ah (wechselbar)
Betriebsspannung	25,25 V
Akku-Kapazität	8 Ah
Motorleistung	0,95 kW
Max. Druck	800 bar
Max. Volumenstrom	3,2 l/min (bei 100 bar)
Betriebsart	automatisch und manuell
Ölvolumen	2,5 l
Gewicht	13,3 kg inkl. Akku
Maße (L x B x H)	520 x 260 x 225 mm
Einsatztemperaturen	-20°C bis +55°C
Schalldruckpegel	<70 dB

Battery system	2pc 28 V 8 Ah exchangeable
Operating voltage	25,25 V
Battery capacity	8 Ah
Motor power	1.27 hp
Max. pressure	11,600 psi
Max. Flow rate	0.85 gal/min at 1,450 psi
Operation mode	automatic and manual
Oil volume	0.66 gal
Weight	29.3 lb incl. battery
Dimensions (L x W x H)	20.46" x 10.23" x 8.85" in
Temp. Range	-4 °F to 131 °F
Sound pressure level	<70 dB



株式会社 日本プララド

E-Mail : info@plarad.net

〒651-2404 兵庫県神戸市西区岩岡町古郷255-6
TEL 078-967-3556 FAX 078-967-3567

全国拠点：札幌、仙台、埼玉、横浜、大阪、神戸、愛媛、北九州

WWW.PLARAD.NET